


Accessories Program

Y-Connector

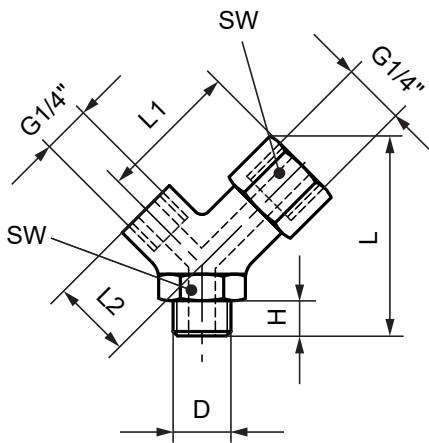

290-10500 Y-connector

1. Introduction

The Y-connector from the range of simatec accessories has the following features:

- Widest possible diameters
- The Y-connector allows to fit one lubrication point with two simalube lubricators. This allows to double the amount of lubricant dispensed.
- The Y-connector is compatible with the entire range of simatec accessories.

2. Technical data

Material: Brass, nickel-plated

Working temperature: -20° C to +55° C

Packing unit: 1 piece

Dimensions:

Article No.	D [mm]	H [mm]	L [mm]	L1 [mm]	L2 [mm]	SW [mm]	Weight [g]
290-10500	R1/4"	10	48	32	18	17	60

3. Installation and start-up

- 3.1 Screw in Y-connector directly at the lubrication point. Use a suitable reducing nipple if necessary. Cover the nipple with sealing tape depending on the thread of the lubrication point.
- 3.2 Screw lubricator directly into the Y-connector. It may be necessary to install a connection between the lubricator and the Y-connector. To do so, use the quick connections Art. No. 290-10600 and 290-10710 and the hose Art.No. 290-20000.

Attention: Always keep connections as short as possible!

4. Note

- Never use the Y-connector in the opposite direction, i.e. never use one Y-connector for two lubrication points.
- Important: activate both lubricators at the same time and set them both to the same dispensing time!