

# ValveMate™ 7140 Controller

The easiest way to achieve exceptional spray pattern definition

For single dispense valve control applications, choose EFD's advanced technology ValveMate 7140 Controller

Spray pattern is defined through a combination of fluid pressure, valve stroke and valve open time, with valve open time providing the greatest control over the volume of fluid sprayed.

The ValveMate 7140 controller is a fast, convenient way to adjust spray valve open time in increments as small as 0.001 seconds. Adjustable 0-30 psi nozzle air pressure regulator provides Low Volume Low Pressure (LVLP) air to the nozzle, for high transfer efficiency without overspray. The result is exceptional spray pattern definition without time-consuming programming or mechanical adjustments that require the production line to be shut down.

## Features and Benefits

- Intuitive, easy user interface
- "On the fly" adjustment
- Timed or continuous spray
- Clean, clog-free cutoff
- Fast-response pneumatic solenoids
- Simple to set up and operate
- Easily interfaced with a PLC
- Digital air output display (psi/bar)



## Specifications


<b>Cabinet Size:</b>	20.0 cm x 14.2 cm x 6.8 cm (7.9" W x 5.6" D x 2.7" H)
<b>Weight:</b>	1.75 kg (3 lbs 14 oz)
<b>Electrical Power Input:</b>	24VDC (+/- 5%), 0.63A maximum
<b>Electrical Input Connector:</b>	Switchcraft L722RA or equivalent, locking type
<b>External Power Adapter:</b>	100-240 VAC (+/-10%), ~ 50/60 Hz input, 24VDC (+/- 5%), 0.63 A output, Switchcraft S761K locking DC plug or equivalent, wall mount, changeable AC plugs.
<b>Feedback Circuits:</b>	EOC Out & Alarm Out: Electronic switch, 24VDC, 100mA maximum.
<b>Initiate Circuits:</b>	5-24 INIT: 5-24VDC initiate signal. CC INIT & Foot Switch: Dry contact initiate circuits, 19mA, closure current. INIT signal duration: No less than 0.012 sec. momentary or maintained for steady.
<b>Cycle Rate:</b>	Exceeds 400 per minute
<b>Time Range:</b>	Programmable 0.001 to 99.9 seconds
<b>Product Classification:</b>	Installation Category II Pollution Degree 2

Meets or exceeds CE and CSA requirements



# ValveMate™ 7140 Controller

Five micron filter regulator

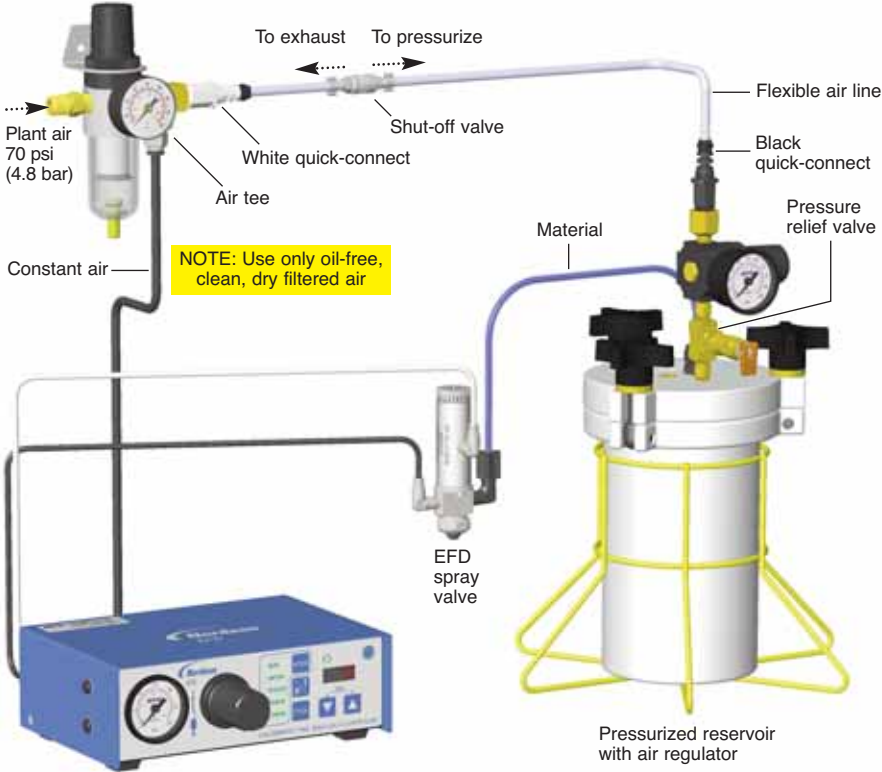

**NOTE: Use only oil-free, clean, dry filtered air**

ValveMate 7140 Controller

ValveMate 7140 controllers feature microprocessor circuitry for precise spray control. Feed lines can be purged, initial spray volumes set, and adjustments made quickly and easily at the spray station, without stopping the production line.

The ValveMate 7140 is simple to set up and operate, and easy to interface with PLCs and other equipment. When the signal to start the cycle is received, the ValveMate's microprocessor takes over and regulates the amount of fluid sprayed as Low Volume Low Pressure air is applied to the nozzle. At the end of the cycle, nozzle air continues for a few milliseconds to ensure a clean clog-free cutoff, and the ValveMate signals that the process has been completed.

For Nordson EFD LLC sales and service in over 30 countries, contact Nordson EFD or go to [www.nordsonefd.com](http://www.nordsonefd.com)

East Providence, RI USA  
USA & Canada: 800-556-3484; +1-401-431-7000  
info@nordsonefd.com [www.nordsonefd.com](http://www.nordsonefd.com)

Dunstable, Bedfordshire, UK  
0800 585733; +44 (0) 1582 666334  
Ireland 00800 8272 9444  
europe@nordsonefd.com [www.nordsonefd.com](http://www.nordsonefd.com)

China: +86 (21) 3866 9006  
china@nordsonefd.com [www.nordsonefd.com](http://www.nordsonefd.com)

Singapore: +65 6796 9522  
sin-mal@nordsonefd.com

The Wave Design is a trademark of Nordson Corporation.  
©2010 Nordson Corporation v111710

