

### Features & Benefits

- 💧 Easy to apply
- 💧 High shear and peel strength
- 💧 Long open time
- 💧 High temperature resistance

### Description

PERMABOND® ET5423 is a thixotropic two-part adhesive with excellent resistance to impact and vibration. The controlled flow properties as well as its ease of mixing and application, enables the adhesive to be used where gap filling is required. Permabond® ET5423 has been found to provide exceptional performance even at elevated temperatures. Permabond® ET5423 has been specifically formulated for use in applications requiring toughness and high strength.

### Physical Properties of Uncured Adhesive

	ET5423 A-side	ET5423 B-side
Chemical composition	Epoxy Resin	Modified Polyamide
Appearance	Off White	Black
Viscosity @ 25°C	20rpm: 105,000 mPa.s (CP) Thixotropic	20rpm: 100,000 mPa.s (CP) Thixotropic
Specific gravity	1.14	1.00

### Typical Curing Properties

Mix ratio	2:1 by volume 100:44 by weight
Maximum gap fill	5 mm <b>0.2 in</b>
Usable / pot life @23°C	10g: 3 hours 200g: 1 hour
Handling Time	23°C: 16 hours
Working Strength	23°C: 24 hours
Full cure	23°C: 5 days 82°C: 1 hour

For improved thermal performance, post-cure the adhesive for 60 minutes at 80°C.


### Typical Performance of Cured Adhesive

Shear strength* (ISO4587)	Aluminium: 30-40 N/mm <sup>2</sup> ( <b>4350-5800psi</b> ) Mild Steel: 30-38 N/mm <sup>2</sup> ( <b>4350-5510psi</b> ) Stainless Steel: 20-26 N/mm <sup>2</sup> ( <b>2900-3770psi</b> ) Hot Dip Galv: 18-24 N/mm <sup>2</sup> ( <b>2610-3480psi</b> ) Carbon Fibre: >22 N/mm <sup>2</sup> ( <b>&gt;3190psi</b> ) SF** Epoxy GFRP: >20 N/mm <sup>2</sup> ( <b>&gt;2900psi</b> ) SF** Polyester GRP: >10 N/mm <sup>2</sup> ( <b>&gt;1450psi</b> ) SF**
Peel strength (aluminium) (ISO4578)	Cured 1hr @ 60°C: 270 N/25mm ( <b>59 PIW</b> ) Cured 5 days @ 23°C: 320 N/25mm ( <b>70 PIW</b> )
Tg (DSC) 5d @ 23°C	60°C ( <b>140°F</b> )
Tg (DSC) 3d @ 23°C + 60min @ 80°C	115°C ( <b>239°F</b> )
Impact strength (ASTM D-950)	20-30 KJ/m <sup>2</sup>
Hardness (ISO868)	>80 Shore D

\*Strength results will vary depending on the level of surface preparation and gap.

\*\*SF Denotes substrate failure (results depend on the quality of the substrates)

### Strength Development

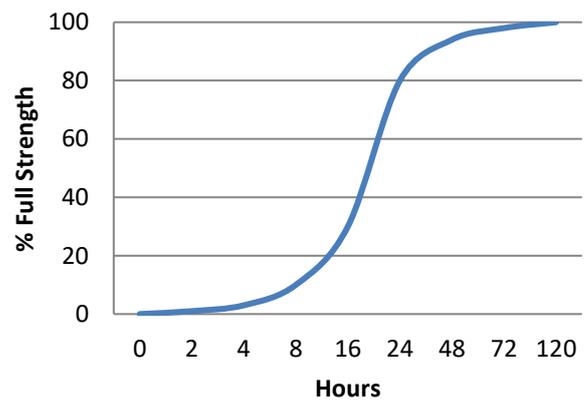


Graph shows typical strength development of bonded components. An increase of 8°C in temperature will halve the cure time. Lower temperatures will result in a slower cure time.

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.

## Hot Strength

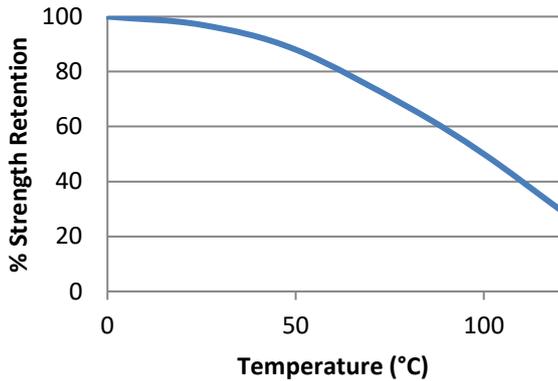

"Hot strength" shear strength. Fully cured specimens conditioned to pull temperature for 30 minutes before testing at temperature.

For improved thermal performance, post-cure the adhesive for 60 minutes at 80°C. ET5423 can withstand higher temperatures for brief periods (such as for paint baking and wave soldering processes) providing the joint is not unduly stressed.

## Additional Information

This product is not recommended for use in contact with strong oxidizing materials.

Information regarding the safe handling of this material may be obtained from the safety data sheet.

Users are reminded that all materials, whether innocuous or not, should be handled in accordance with the principles of good industrial hygiene.

This Technical Datasheet (TDS) offers guideline information and does not constitute a specification.

## Storage & Handling

Storage Temperature	5 to 25°C (41 to 77°F)
---------------------	------------------------

## Surface Preparation

Surfaces should be clean, dry and grease-free before applying the adhesive. Use a suitable solvent (such as acetone or isopropanol) for the degreasing of surfaces. Some metals such as aluminium, copper and its alloys will benefit from light abrasion with emery cloth (or similar), to remove the oxide layer.

## Directions for Use

1. Dual cartridges:
  - a) Insert the cartridge into the application gun and guide the plunger into the cartridge.
  - b) Remove the cartridge cap and dispense material until both sides are flowing.
  - c) Attach the static mixer to the end of the cartridge and begin dispensing the material.
2. Apply material to one of the substrates.
3. Join the parts. Parts must be joined within the usable pot life of mixing the two epoxy components.
4. Large quantities and/or higher temperature will decrease the usable life or pot life.
5. Apply pressure to the assembly by clamping until handling strength is obtained.
6. Full cure will be obtained after 5 days at 23°C (74°F). Heat can be used to accelerate the curing process.

**NB. Exercise caution when mixing large quantities due to exothermic reaction.**

## Video Links

Surface preparation:

<https://youtu.be/8CMOMP7hXjU>



Two-part epoxy directions for use:

<https://youtu.be/GRX1RyknYqc>



[www.permabond.com](http://www.permabond.com)

• UK: 0800 975 9800

• General Enquiries: +44 (0)1962 711661

• US: 732-868-1372

• Asia: + 86 21 5773 4913

[info.europe@permabond.com](mailto:info.europe@permabond.com)

[info.americas@permabond.com](mailto:info.americas@permabond.com)

[info.asia@permabond.com](mailto:info.asia@permabond.com)

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.

Permabond ET5423

Global TDS Revision 0

02 April 2025

Page 2/2

**FOR PROFESSIONAL OR INDUSTRIAL USE ONLY. KEEP OUT OF REACH OF CHILDREN**