



Accessories Program


Connection Bends



290-10010 Bent connection 45° R1/4"



290-10020 Bent connection 90° R1/4"

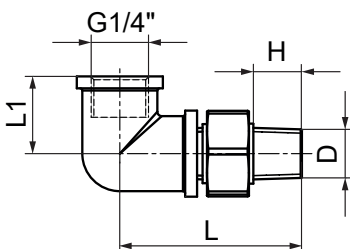

290-10040 Bent connection 90° swiveling R1/4"

1. Introduction

Three bent connections are available. These accessories have the following features:

- No angles but round bent channels.
- Wide diameters, no contractions which can cause unnecessary counter-pressure.
- The bent connections are compatible with the entire range of simatec accessories.

2. Technical data

Working temperature: -20° C to +55° C

Packing unit: 10 pieces

Dimensions:

Art.-No.	D	H [mm]	L [mm]	L1 [mm]	Weight [g]	Material
290-10010	R1/4"	11	21	26	34	cast, nickel-plated
290-10020	R1/4"	10	28	22	38	cast, nickel-plated
290-10040	R1/4"	11	41	17.5	70	brass

3. Installation and start-up

- 3.1 Screw bent connection in directly at the lubrication point. Use a suitable reducing nipple if necessary. Cover the lubrication point with sealing tape depending on the thread.
- 3.2 Screw the lubricator directly into the bent connection. It may be necessary to install a connection between the dispenser and the bent connection. To do so, use the quick connections Art. No. 290-10600 and 290-10710 and the hose Art. No. 290-20000.

Keep connections as short as possible!

4. Note

- Swivelling screw fittings usually have small angled bores, which can lead to an extremely high working pressure.