




Food Grade Lubrication

Performance you can trust



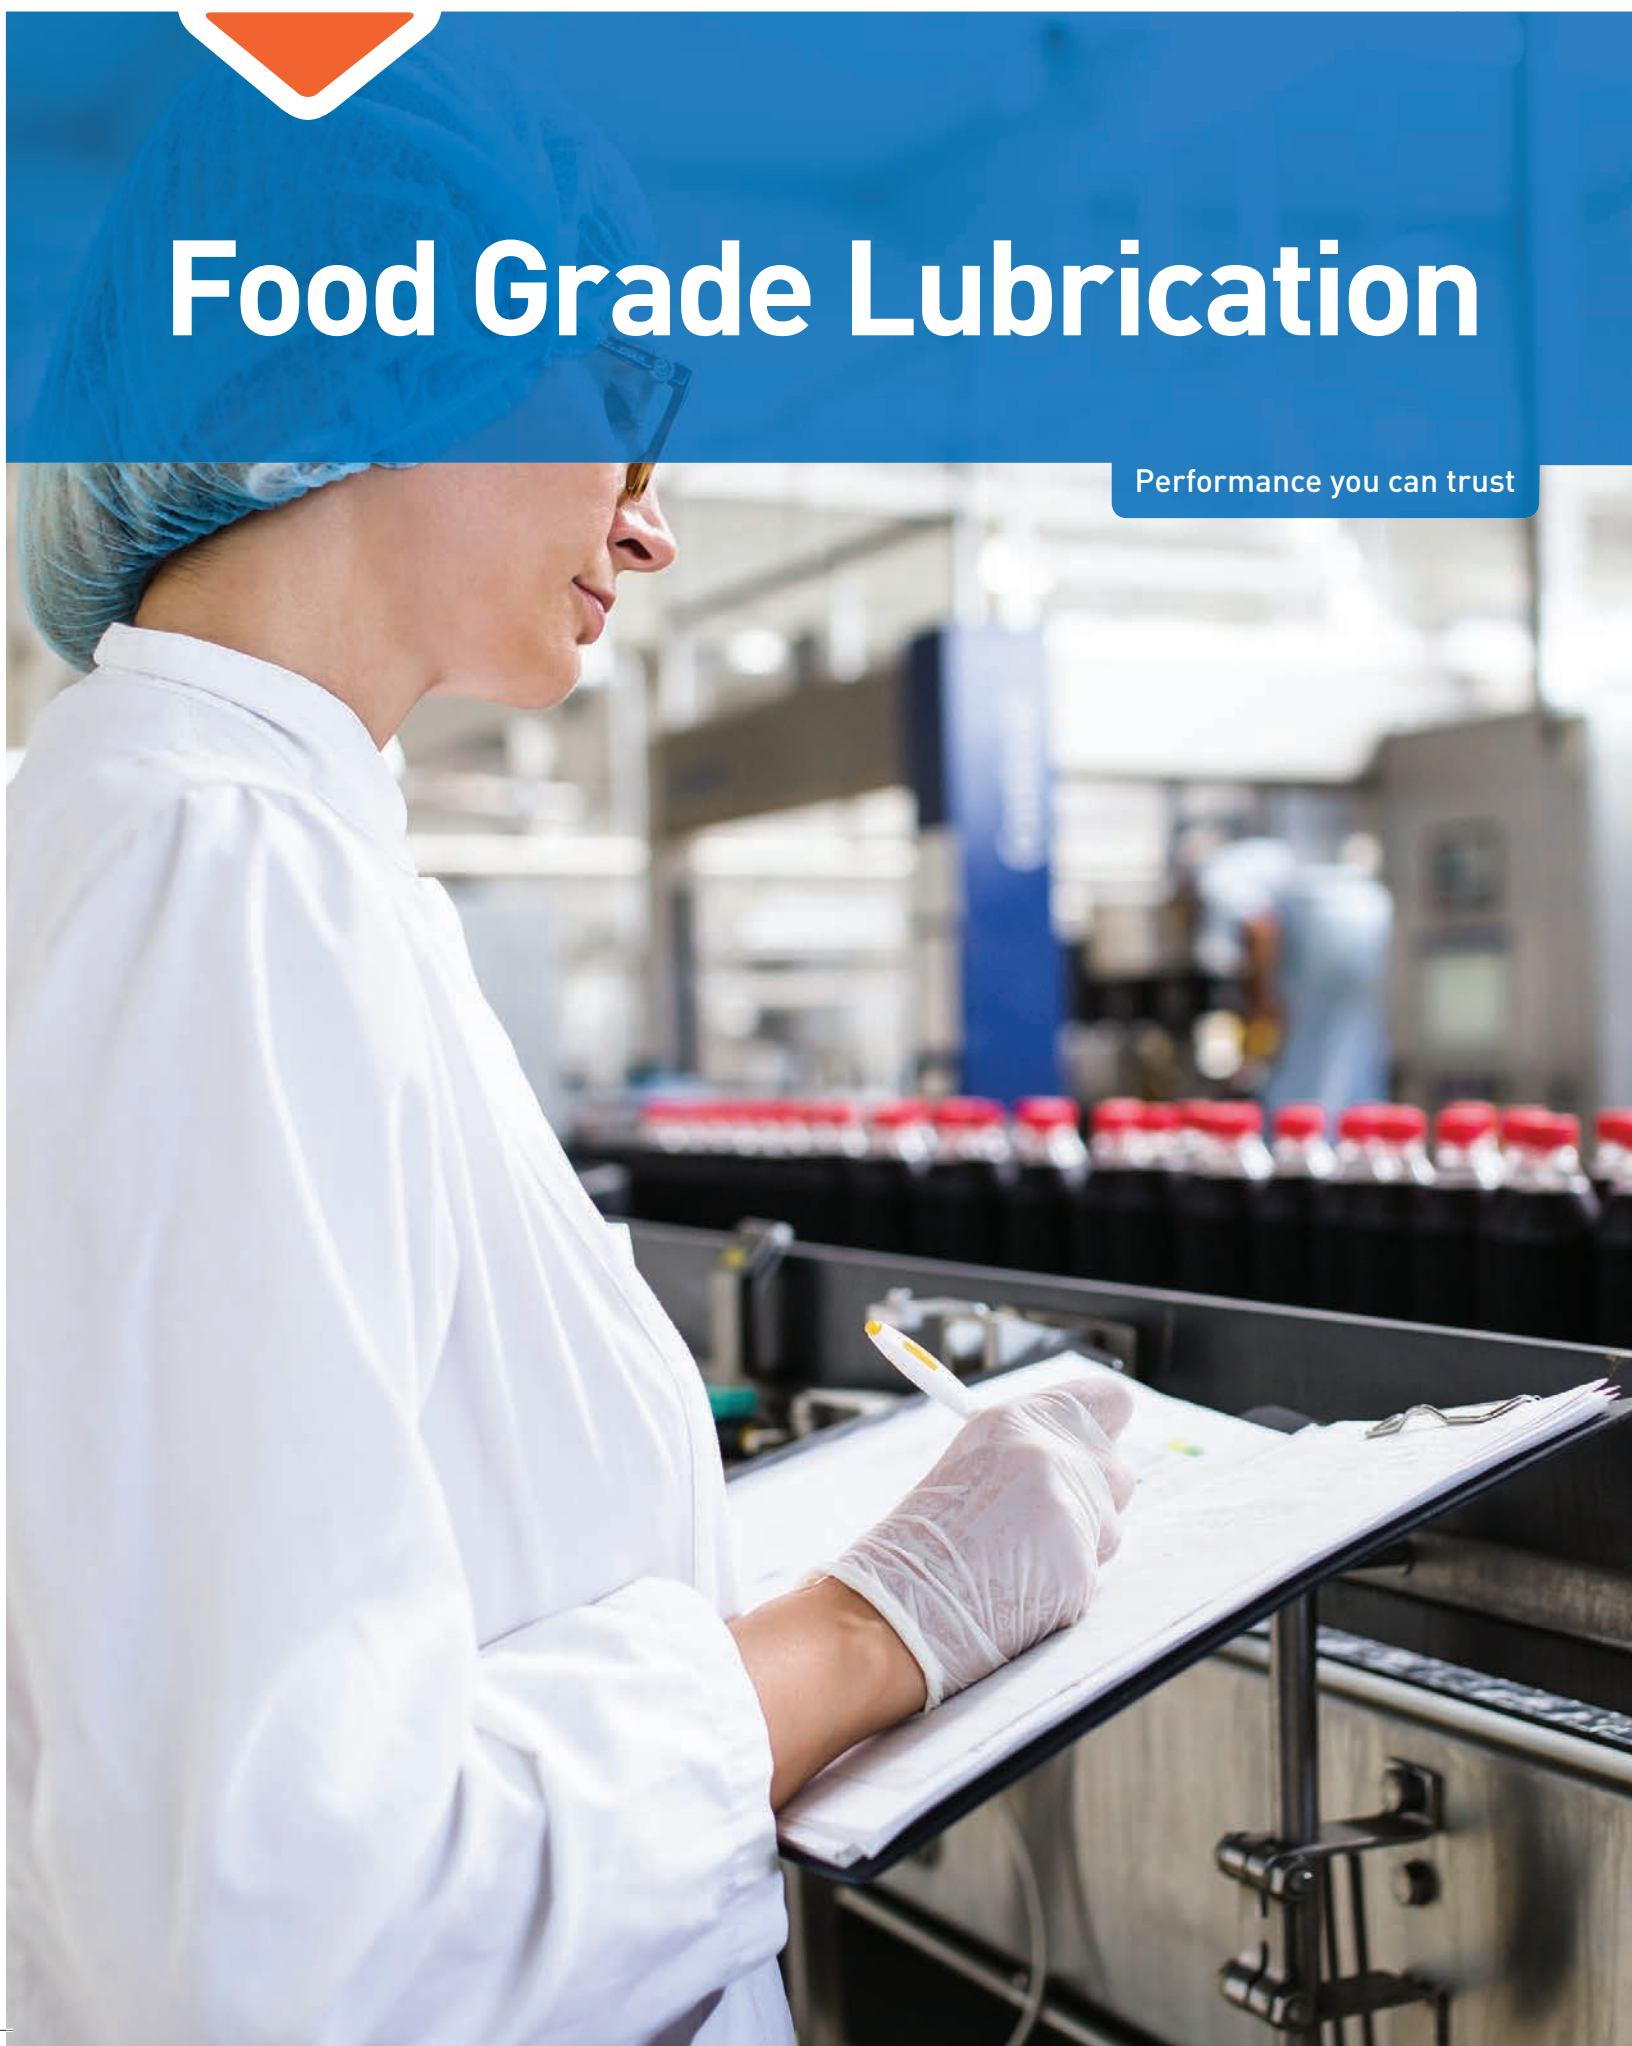

From product concept, design and development through to technical expertise and customer services, ROCOL® supports your lubrication needs.

Contents

ISO21469	4
Detex™	5
PFAS FREE Formulations	5
ROCOLcare®	6 / 7
Bearing Greases	8 / 11
Knowledge Centre	12
Chain Lubricants	13 / 16
Purol Direct Contact Lubricants	17
Gear Oils	18
Hydraulic, Compressor and Vacuum Pump Oils	19
Industrial Cleaners	20
Multi-purpose Maintenance Products	22 / 23
Anti-Seize and Assembly Products	24 / 25
NSF Categories	26
Case Study	27

Performance you can trust for the food industry



The sectors we serve

- ▶ Fruit and Vegetables
- ▶ Meat
- ▶ Fish
- ▶ Pharmaceutical
- ▶ Dairy
- ▶ Confectionery
- ▶ Bakery
- ▶ Drinks

Technically advanced lubricants developed by our chemists and engineers to meet customer needs.

Our food grade products:

- ▶ Reduce production downtime
- ▶ Avoid costly product recalls
- ▶ Support audit compliance

All FOODLUBE® products:

- Are NSF H1 registered:
For incidental food contact
- Are ISO 21469 Certified
- Do not contain MOSH (Mineral Oil Saturated Hydrocarbon) or MOAH (Mineral Oil Aromatic Hydrocarbon)
- Have PFAS Free Formulations (NSF 537)
- Are Vegan-friendly: Suitable for use in facilities that manufacture vegan products
- Are Halal Certified
- Are Kosher Certified





FOODLUBE®

FOODLUBE® from ROCOL® is the lubrication solution of choice in the food industry

In addition to being NSF H1 Registered for food safety, FOODLUBE products help to improve cleanliness and efficiency while significantly reducing costs and downtime.

Today, for our customers, the FOODLUBE brand is synonymous with:

- Increased overall equipment efficiency
- Full audit compliance
- Training and support
- Peace of mind
- Food safety

ROCOL have spent over two decades working with leading food companies, enabling us to offer industry-leading advice on achieving effective results. We help customers implement a lubrication management system that aligns with food safety legislation and HACCP processes.

ISO 21469

The globally recognised ISO 21469:2006 certification ticks an important box for auditors as it provides credible, independent assurance that all ROCOL products are formulated, manufactured and supplied hygienically and safely.

For any food and drink manufacturer using FOODLUBE lubricants, especially those reliant on leading retailers through long-term contracts, this provides a vital first step towards conforming with major supermarket, European Food Safety Inspection Service and British Retail Consortium audit requirements.

Products in the FOODLUBE range are NSF-H1 registered and are therefore compliant lubricants for use in applications where incidental food contact may occur during manufacturing.

ISO 21469:2006 builds on the product-specific NSF-H1 standard to represent another important layer of safety approval. Products are manufactured to stringent recipe and hygiene standards using good manufacturing practices, dedicated equipment and strict handling procedures. Each product is hygiene assured as it has been independently verified by an NSF inspector and tested in their laboratories. It is then deemed safe for incidental food contact and certified as being manufactured only from FDA listed ingredients.



CONCERNED ABOUT CONTAMINATION?		
 Metal Detectable Plastic components for aerosols	 The right product at the right place at the right time	 Food Safe lubricants NSF H1-3H certified

PEACE OF MIND, QUALITY ASSURANCE, FULL AUDIT COMPLIANCE	
	



DETEX®

DETEX metal detectable packaging components are designed to assist food processing plants in meeting strict HACCP requirements regarding the use of the ROCOL® NSF accredited products.

- ▶ All blue, removable plastic components are metal detectable and capable of detection by most metal detection equipment and x-ray machines
- ✓ Reduce concerns of food product contamination and assist with HACCP requirements
- ▶ All blue, removable plastic components are GRAS listed (Generally Regarded As Safe – FDA 21 C.F.R Sections 177 and 178)
- ✓ Meets FDA requirements as acceptable material for use in food processing plants



PFAS FREE FORMULATIONS

All ROCOL FOODLUBE products have PFAS free formulations.

Although we recognise that there is no PFAS ban in force today, as market leaders in food grade lubricants we are committed to being ahead of the curve. We have listened to our customers in the food industry who want to stay ahead of regulations and have peace of mind that they are doing everything they can to reduce their environmental impact. For that reason, we have updated our FOODLUBE product range to have PFAS free formulations.





What is ROCOLcare®?

ROCOLcare is the premium survey package for the food, clean and associated industries that offers the following features and benefits:

Increased efficiency

Increases lubricant efficiency, improvements in plant productivity and cost reduction through extended equipment life.

Risk reduction

Establishes all your lubricant requirements and ensures contamination free lubrication.

Rationalisation

Rationalises your lubricant usage and reduces your stock holding on site.

Full audit compliance

ROCOL® is the UK's first ISO 21469:2006 certified lubricants manufacturer. ISO 21469 is a globally recognised hygiene certification by auditors. It provides credible, independent assurance that all ROCOL products are formulated, manufactured and supplied hygienically and safely.

Training

Best practice lubrication training is available in a format that suits our customers.

ROCOLcare customers:

Enjoy peace of mind

Assurance that you and the lubrication experts are working together in partnership.

Achieve operational excellence

Efficiencies are increased through the ROCOL preventative and proactive approach to lubrication management.

Optimise and rationalise

Rationalises your lubricant usage and reduces your stock holding on site.

Have assurance of full traceability

All ROCOL products are developed, manufactured, passed through a stringent QC process and despatched from the ROCOL UK manufacturing site.



TPM Compatible

- ▶ ROCOLcare is modular and can be integrated into your maintenance programme



“ROCOLcare® is your complete lubrication solution. Our tailored program contains 5 modular elements to give you the best service according to your needs „

▶ 1. FOODLUBE® PRODUCTS

A comprehensive range of NSF H1 ISO 21469 certified products ensures audit compliance and gives full traceability.

▶ 2. SURVEY

A bespoke survey of your lubrication requirements matches every single application with the correct lubricant.

▶ 3. STORAGE SOLUTIONS

There are various options available that can be tailored to your site's needs. During the Rocolcare survey, your Rocol® Sales Engineer will be able to make the necessary recommendations. Options include a fully stainless steel oil storage unit for storing all your lubricants and the relevant documentation.

▶ 4. TRAINING

Certified training helps staff to understand the essential principles of lubrication and how to apply them.

▶ 5. TECHNICAL SUPPORT

On and off-site support from a team of chemists and professional engineers.





Why choose FOODLUBE® bearing greases?

ROCOL® has a comprehensive range of food grade greases designed to deliver high performance in demanding conditions.

The FOODLUBE range offers various greases designed for every application, from general purpose through to extremely adverse conditions.

Specific conditions include: high temperature, low temperature, high load, high speed, high vibration, caustic conditions, wet conditions, etc.

A variety of grease thicknesses are available including; semi-fluid, standard and thick. FOODLUBE provides a solution in the right format for your application.

**Also available: PUROL™
- Direct contact food grease (NSF H1/3H).**


ISO 21469 certified multi-purpose grease for direct food contact as a food processing release agent.



All PUROL® products:

- Have PFAS Free Formulations
- Are Vegan-friendly: Suitable for use in facilities that manufacture vegan products
- Are Halal Certified
- Are Kosher Certified

SELECTION CHART

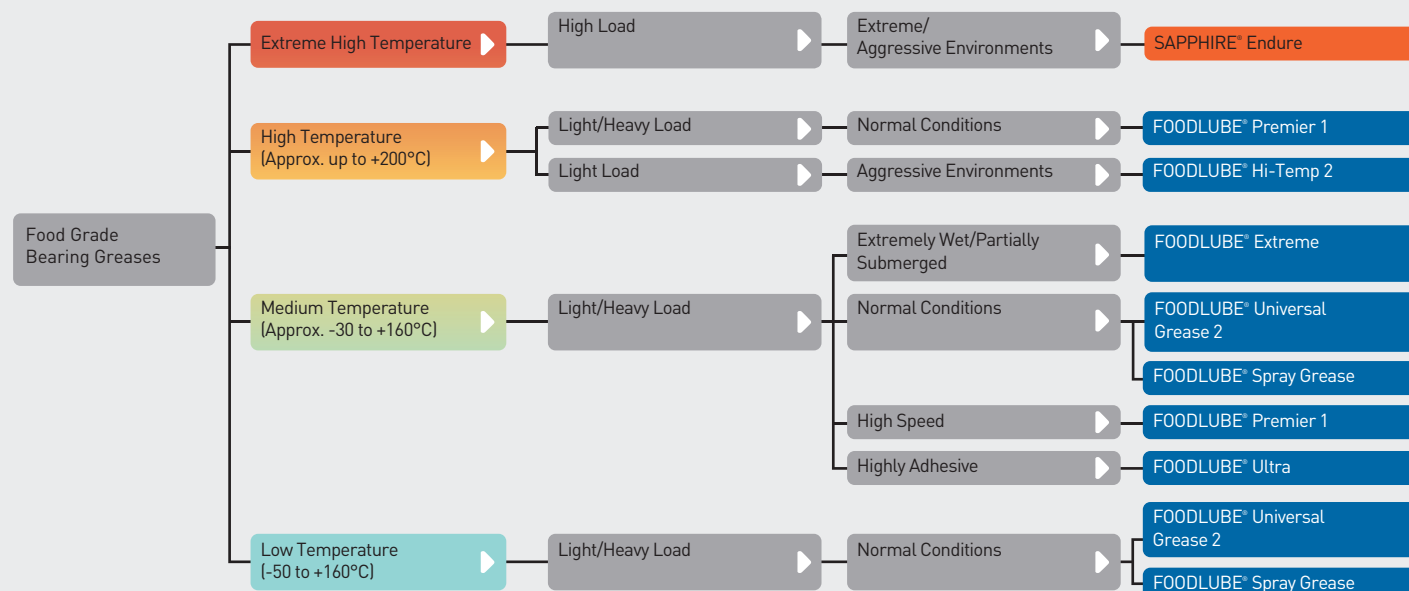

Bearing Greases

General Purpose



BEARING
GREASES



7 H1 537

FOODLUBE® UNIVERSAL GREASE 2

TEMP RANGE

-50°C to +160°C

High performance, multi-purpose, food grade grease for maximum bearing life.

A truly universal, extreme pressure grease, designed for the enhanced lubrication of all types of ball, roller and plain bearings.

- ▶ Superior load and wear properties - significantly extends bearing life
- ▶ Highly resistant to water washout - excellent corrosion protection
- ▶ Also available as an aerosol

Description	Part code	Size
NLGI 2	15231	380g
	15236	4kg
	15234	18kg



37 H1

FOODLUBE® ULTRA

TEMP RANGE

-15°C to +160°C

A highly adhesive food grade grease for plain bearings and sliding surfaces.

Adhesive, multipurpose extreme pressure grease. Designed for the effective lubrication of slides, cams, gears and plain bearings.

- ▶ Extremely durable long life grease film
- ▶ Does not drip or fling off
- ▶ Highly resistant to water wash off - excellent corrosion protection
- ▶ High load and wear properties - significantly extends bearing life

Description	Part code	Size
NLGI 2/3	15811	380g



42 H1 537

FOODLUBE® PREMIER 1

TEMP RANGE

-30°C to +180°C

Food grade grease for bearings operating at high speeds and temperatures.

A high performance EP grease, designed for enhanced lubrication, particularly high speed and high temperature applications.

- ▶ For electric motors and fan and conveyor bearings
- ▶ High load and wear properties - significantly extends bearing life
- ▶ Highly resistant to water washout - excellent corrosion protection

Description	Part code	Size
NLGI 1	15291	380g
	15281	380g (Shuttle Cartridge)
	15294	18kg



31 H1 537

FOODLUBE® SPRAY GREASE

TEMP RANGE

-50°C to +160°C

Food grade, multi-purpose, extreme pressure grease in aerosol.

FOODLUBE Spray Grease is FOODLUBE Universal Grease 2 in an aerosol can for convenient application. It is a white, non-toxic lubricant designed for the effective lubrication and protection of ball, roller and plain bearings, slides, pins, linkages and bushes operating in food, pharmaceutical and other clean environments.

- ▶ Highly resistant to water wash-off - offers excellent corrosion protection
- ▶ Excellent oxidation stability resulting in extended relubrication intervals and a reduction in lubricant usage

Part code	Size
15030	400ml



Adverse conditions (high temp/wet/caustic)

Our FOODLUBE® range provides products with enhanced performance in adverse conditions such as high temperatures and wet or caustic environments. Our products take the stress of these types of applications so you don't have to.



15 H1 537

FOODLUBE® HI-TEMP 2

TEMP RANGE

-20°C to +200°C

High temperature food grade grease.

A silicone grease, suitable for high temperature applications. Designed for the lubrication of all types of slower bearings and sliding surfaces.

- ▶ Good anti-wear properties - extends bearing life
- ▶ Highly resistant to water wash off - excellent corrosion protection
- ▶ Ideal for rubbers and plastics
- ▶ Semi translucent appearance
- ▶ Good chemical resistance

Description	Part code	Size
NLGI 2	15251	380g
	15256	4kg
	15254	18kg



56 H1

SAPPHIRE® ENDURE

TEMP RANGE

-25°C to +280°C

Premium extreme temperature and chemical resistant grease.

Extreme performance perfluorinated polyether EP grease. Designed to operate where conventional greases fail due to chemical contamination or attack.

- ▶ Extreme chemical and solvent resistance - resists caustic wash down
- ▶ Greatly extends lubrication intervals - reduced lubricant usage
- ▶ Excellent load carrying and anti-wear properties - significantly extends bearing life

Extremely stable at high temperatures

Description	Part code	Size
NLGI 00	15503	525g
	15504	5kg
	12330	100g
NLGI 2	12331	700g
	12334	1kg
	12336	5kg
	12337	18kg

BEARING GREASES - WET CONDITIONS



34 H1

FOODLUBE® EXTREME

TEMP RANGE

-20°C to +150°C

Food grade grease for extremely wet applications.

A highly tenacious extreme pressure bearing grease with superior performance in wet conditions, for the lubrication of all types of ball, roller and plain bearings.

- ▶ Superior water resistance - excellent corrosion protection
- ▶ High load and wear properties - significantly extends bearing life
- ▶ Resists water wash out

Description	Part code	Size
NLGI 2	15241	380g
	15282	380g (Shuttle Cartridge)
	15246	4kg
	15244	18kg



Bearing Greases

High Temperature



BEARING
GREASES

Automatic lubrication systems

Automatic lubrication systems/applications have specific needs. These greases have characteristics which provide superior performance in automatic systems of all types giving you peace of mind that the grease will arrive where it needs to be and do the job it needs to do.



59 H1 537

FOODLUBE® AUTO SF

TEMP RANGE

-20°C to +150°C

High performance, food grade, semi-fluid grease.

Designed specifically for automatic lubrication systems, where long pipe runs and small bore piping cause blockage or delivery issues. Formulated to deliver all of the benefits expected from ROCOL long life greases with the added benefit of pumpability.

- ▶ Excellent stability - extended relubrication intervals and a reduction in lubricant usage
- ▶ Highly resistant to water wash off - excellent corrosion protection
- ▶ Gives good visibility in translucent pipework to allow easy checking that the system is dispensing

Part code Size

15912

4kg

15913

18kg



60 H1

FOODLUBE® AUTOLUBE COMPLETE AND REFILL

GREASE TEMP RANGE

-30°C to +160°C

AUTOLUBE DISPENSER
TEMP RANGE

-10°C - +60°C

Food grade, electromechanical grease dispenser for trouble free lubrication.

Electromechanical, fully automatic lubrication system containing FOODLUBE Premier 1. Delivers exact quantities of grease, over varied time periods, to all types of ball, roller and plain bearings.

- ▶ Variable from 1 - 12 monthly increments
- ▶ Easy to install and maintenance free
- ▶ Ideal for non-accessible areas
- ▶ Temperature compensator unit built in
- ▶ LED lights to show when in operation/when empty

Part code

15220 (refill only - batteries included)

15224 (complete unit)

Size

120ml

120ml



66 H1 537

FOODLUBE® HI-LOAD SF

TEMP RANGE

-20°C to +160°C

An EP semi-fluid grease for use in automatic lubrication systems and grease filled gearboxes where NSF H1 is required.

A semi-fluid grease for use in automatic lubrication systems feeding highly loaded bearings. Also, very effective when used as a gearbox grease.

- ▶ Specifically designed for use on highly loaded bearings fed by small bore pipe work in automatic lubrication systems
- ▶ Good load carrying capability - 355kg Weld Load
- ▶ Excellent stability - extended relubrication intervals and a reduction in lubricant usage

Part code Size

15966

4kg

15964

18kg



61 H1

FOODLUBE® UNILUBE

GREASE TEMP RANGE

-30°C to +180°C

UNILUBE TEMP RANGE

-20°C to +60°C

Food grade, multipurpose, extreme pressure (EP) grease in an automatic lubricator.

A fully automatic gas activated lubricant dispenser filled with FOODLUBE Premier 1 grease. Provides consistent and constant lubrication of all types of ball, roller and plain bearings.

- ▶ 120ml capacity
- ▶ Compact design enabling application in hard to reach places
- ▶ Transparent housing making it easier to monitor lubricant levels
- ▶ Variable from 1 - 12 monthly increments
- ▶ Easy to install and maintenance free

Part code

13010

Size

125ml

ROCOL® is synonymous with quality and that reputation comes from developing technically advanced products for demanding industry applications.

We develop products that display significant advantages over the competition, advantages that add true value to our customers.



We formulate and test our products in-house but, also carry out independent testing which means that you can be sure that you are using the best product for the job.

To guarantee we achieve this, Rocol's team of chemists and engineers develops all products in accordance with the ISO 9001 system and is certified to internationally recognised standards.

Our products exist to serve you. By working within our AS 9100:2016 and ISO 9001:2015 accredited quality management systems, we ensure that we continue to deliver products that exceed our customer expectations. From product concept and design through to technical expertise and customer services, all the functions at Rocol are carefully controlled, meaning you consistently get what you need.

Each batch of every product we manufacture is tested by the experienced personnel in our quality control laboratory and released for use only when we are confident that it meets the high standards of quality and superior performance associated with all Rocol products: performance you can trust.

- ▶ Technically advanced products for demanding industry applications
- ▶ Products formulated and tested in-house as well as to industry standards
- ▶ All products developed in accordance with AS 9100:2016 and ISO 9001:2015 accredited Quality Management System
- ▶ Each product tested in our quality control laboratory – only released when ready for use in your applications

Chain Lubricants

Food Grade




Chain lubricants

Our comprehensive range of products is designed to lubricate and protect chains operating in the food and clean industries. Whatever the type of drive or conveyor chain in use, we can provide a lubricant to ensure trouble free operation -

cutting expensive downtime and increasing productivity.

All our FOODLUBE® chain lubricants are NSF H1 registered and ISO 21469 certified - unless otherwise stated.

SELECTION CHART

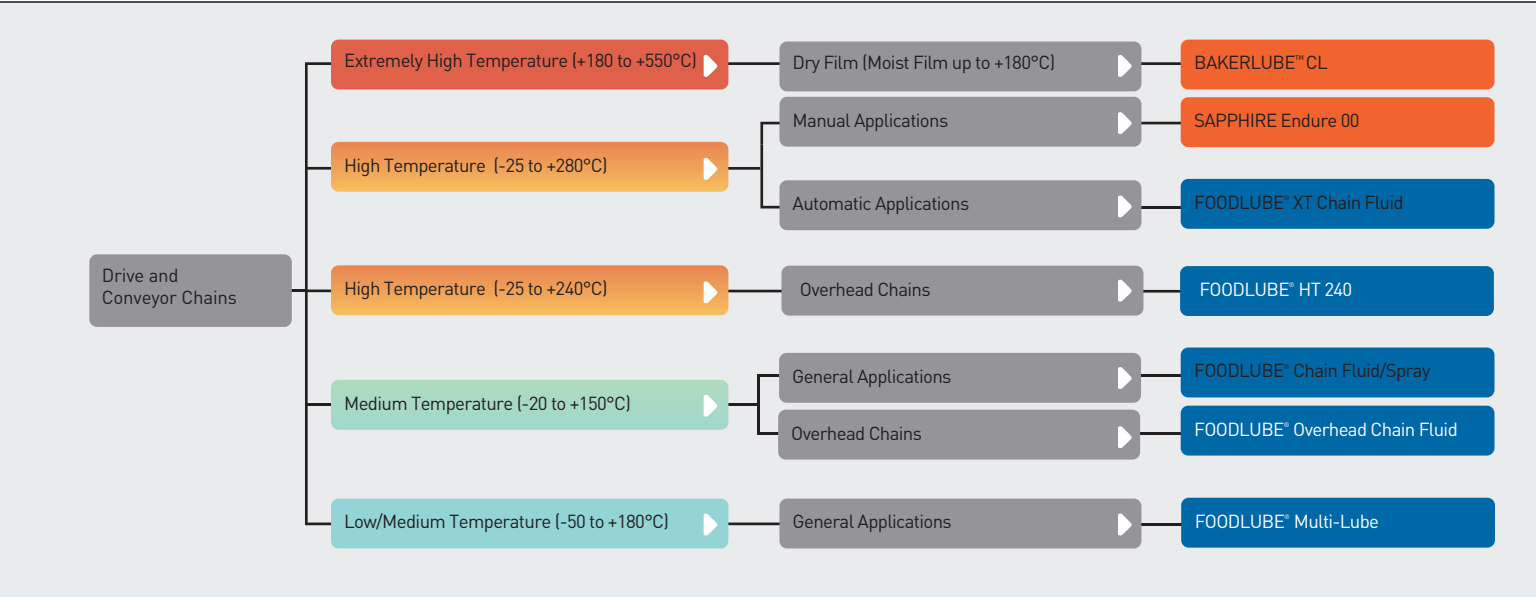

10 H1 537

FOODLUBE® CHAIN FLUID

TEMP RANGE
-20°C to +150°C



Tenacious, food grade lubricant for extended chain life.

Versatile, high performance, chain lubricant suitable for all types of drive and conveyor chains.

- ▶ Lubricant penetrates into links and pins - maximum protection
- ▶ Tenacious low drip formulation - reduces the risk of production line contamination
- ▶ Protects against corrosion
- ▶ Good load carrying capacity - extends chain life
- ▶ Good resistance to water wash off - protects throughout clean downs

Part code	Size
15506	5L
15505	20L





Specialist chain oils

Building on our success in general chain applications, we are able to provide enhanced solutions for chains operating in more specialist applications, such as: overhead chains.

16 H1 537

FOODLUBE® CHAIN SPRAY

TEMP RANGE
-20°C to +150°C



Tenacious, food grade spray lubricant for extended chain life.

Convenient aerosol chain lubricant. Ideal for lubrication of all types of drive and conveyor chains.

- ▶ Outstanding penetration into links and pins - maximum protection
- ▶ Highly resistant to water wash off - protects throughout clean downs
- ▶ Good water displacing properties
- ▶ Tenacious low drip formulation - reduces the risk of production line contamination
- ▶ Good load carrying capacity - protects critical parts of the chain

Part code
15610

Size
400ml

62 H1

**FOODLUBE® CHAIN
FLUID UNILUBE**

OIL TEMP RANGE
-20°C to +150°C

AUTOLUBE DISPENSER
TEMP RANGE
-20°C to 60°C



Food grade, multipurpose, chain and conveyor lubricant in an automatic lubricator.

Specifically formulated to reduce contamination issues on all drive and conveyor chains - particularly for the meat processing industry.

- ▶ Lubricant penetrates into links and pins - maximum protection
- ▶ Tenacious low drip formulation - reduces the risk of production line contamination
- ▶ Protects against corrosion
- ▶ Good load carrying capacity - extends chain life
- ▶ Good resistance to water wash off - protects throughout clean downs

Part code
13011

Size
125ml



Chain Lubricants

Food Grade



25 H1 537

FOODLUBE® OVERHEAD CHAIN FLUID

TEMP RANGE
-20°C to +150°C

Highly adhesive, food grade lubricant for overhead chains.

Specifically formulated to reduce contamination issues on all drive and conveyor chains - particularly for the meat processing industry.

- ▶ Tenacious low drip formulation - reduces the risk of production line contamination
- ▶ Excellent corrosion protection
- ▶ Good water wash off resistance - protects throughout clean downs

Part code Size
15785 20L



54 H1 537

FOODLUBE® HT 240

TEMP RANGE
up to +240°C

Long lasting, high temperature, food grade chain lubricant.

Non-toxic, water resistant lubricant designed primarily for the effective lubrication of various high temperature chains and conveyors in food, pharmaceutical and other clean environments.

- ▶ Good penetration and load carrying properties ensuring that the product lubricates and protects inside rollers, links, pins etc.
- ▶ Highly adhesive providing excellent water wash-off resistance and corrosion protection
- ▶ Extremely low evaporation rate resulting in a long wet life at high temperatures for maximum lubricant economy

Part code Size
16765 20L
16769 200L






Chain Lubricants Bakery Environment

Oven chain lubricants

Our oven chain lubricants provide the best solution for that critical operation in your production process. These chain lubricants will make chains last longer with much less unplanned maintenance - keeping your costs low and your mind at rest.



CHAIN
LUBRICANTS

57 H1 537

FOODLUBE® XT CHAIN FLUID

TEMP RANGE
-0°C to +280°C



Formulated from a combination of synthetic esters and a special antioxidant package.

Ensures the highest performance in terms of thermal stability, low evaporation loss and minimal deposit formation

- ▶ Excellent penetration properties
- ▶ Low evaporation rates – low fuming and longer wet film life
- ▶ Low deposit and varnish formation
- ▶ Excellent anti wear properties

Part code

15800

15801

Size

20L

200L



Food Grade For Direct Food Contact



PUROL™ 3H lubricants

All PUROL products are ISO 21469 certified and...

- NSF-3H registered: Release agent for direct contact with food
- NSF-H1 registered: Safe for incidental contact with food



52 H1 3H

PUROL™ GREASE

TEMP RANGE

-10°C to +110°C



51 H1 3H

PUROL™ FLUID

TEMP RANGE

-10°C to +110°C

Multi-purpose grease and food processing release agent for direct food contact.

- ▶ Does not contain animal derived materials, nut oils or genetically modified ingredients
- ▶ Reduces equipment down-time
- ▶ Increases re-lubrication intervals - reduced lubricant spend
- ▶ Exhibits excellent EP performance with a 4-ball weld load of 355 kg
- ▶ For use as a direct food contact release agent as well as a lubricant for seals

Part code	Size
15611	370g
15616	4kg
15614	18kg

Multi-purpose oil and food processing release agent for direct food contact.

A clear, non-toxic lubricant designed for the effective lubrication and protection of seals, guides, bearings and blades particularly those operating in food, pharmaceutical and other clean environments where direct food contact is inevitable.

- ▶ Less risk of contamination
- ▶ Good oxidation stability results in extended lubrication intervals - reduced lubricant spend
- ▶ Suitable for protecting knives and surfaces from corrosion

Part code	Size
15617	500ml
15619	20L



**PUROL™
SPRAY GREASE**
ALSO AVAILABLE

53 H1 3H

Part code Size
15631 400ml





Gear Oils Food Grade


ROCOL® manufacture a comprehensive range of gear, compressor and hydraulic oils which are designed to provide extended service life, thereby reducing maintenance time and costs.

All NSF H1 Registered and
ISO 21469 Certified



FOOD GRADE
GEAR OILS

SELECTION CHART

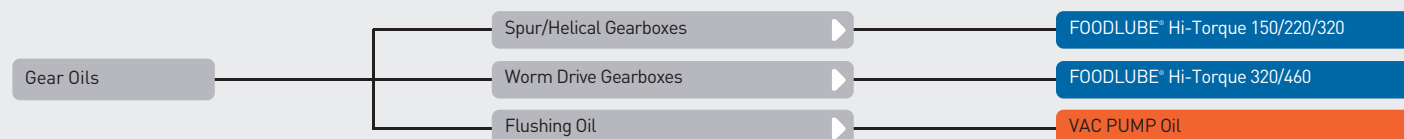

If you require help in selecting a product, contact ROCOL direct: **+44 (0) 113 232 2600**

FOODLUBE® HI-TORQUE

TEMP RANGE

-20°C to +150°C

Food grade gear oil with start up protection system.

High performance fully synthetic gear oils incorporating start up protection system (SUPS) and anti wear additives to provide maximum lubrication and protection in all types of gearboxes.

- ▶ SUPS – a unique protection for gear teeth on start up and in use
- ▶ Outstanding load carrying performance: FZG load stage 12
- ▶ Excellent anti-wear performance - no need for additional additive treatments



For more
information on
SUPS, please scan
the QR code

Description	Part code	Size
Hi-Torque 150	15426	5L
28 H1 537	15425	20L
	15429	200L



Description	Part code	Size
Hi-Torque 220	15526	5L
8 H1 537	15525	20L
	15529	200L



Description	Part code	Size
Hi-Torque 320	15766	5L
13 H1 537	15765	20L
	15769	200L



Description	Part code	Size
Hi-Torque 460	15775	20L
27 H1 537	15779	200L



Hydraulic, Compressor and Vacuum Pump Oils

Food Grade



All NSF H1 Registered
and ISO 21469 Certified



FOOD GRADE
COMPRESSOR
& HYDRAULIC
OILS

FOODLUBE® HI-POWER FLUIDS



High performance, food grade oils for compressor, hydraulics and airline systems.

High performance, fully synthetic oils incorporating an optimum blend of high performance additives. Suitable for use in hydraulics, air compressors and airline systems.

- ▶ Enhanced oxidation stability
- ▶ Extremely low sludge build up
- ▶ Minimal foaming
- ▶ Unique L-CO system, reduces carry over

Description

Hi-Power 22

5 H1 537

Hi-Power 32

6 H1 537

Part code

15796

15795

15799

15896

15895

15899

Size

5L

20L

200L

5L

20L

200L

Description

Hi-Power 46

18 H1 537

Hi-Power 68

3 H1 537

Hi-Power 100

17 H1 537

Part code

15996

15995

15999

16006

16005

16009

15946

15945

15949

Size

5L

20L

200L

5L

20L

200L

5L

20L

200L

35 H1

VAC PUMP OIL

Food grade lubricant for extended vacuum pump life.

High performance lubricating fluid for use in vac pumps.

- ▶ Suitable for high load and high pressure conditions
- ▶ Clean and low odour
- ▶ Low deposit formation
- ▶ Prevents corrosion from moisture ingress
- ▶ Ideal for use as a gear box flushing oil



Part code

16806

16805

Size

5L

20L

TEMP RANGE

-5°C to +130°C






ROCOL® food grade corrosion preventatives protect metal components, extending working life and reducing the need for rework and repair.



FOOD GRADE
CORROSION
PROTECTION

SELECTION CHART

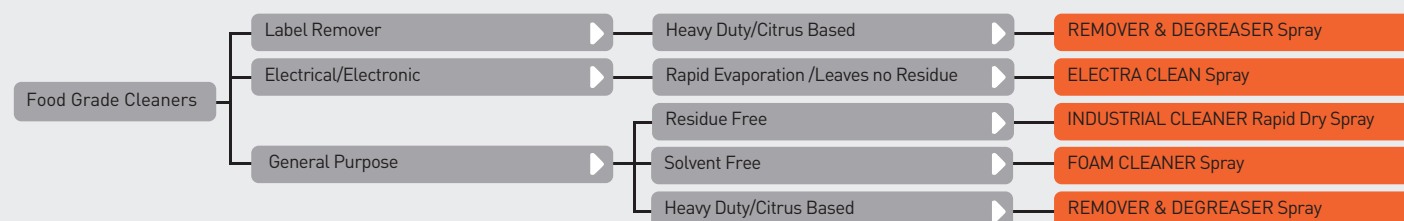

46 K1

INDUSTRIAL CLEANER RAPID DRY SPRAY

Food grade, solvent based multi-purpose cleaner.

Fast drying, powerful solvent cleaner - evaporates quickly leaving no residue.

- ▶ A specially formulated blend of degreasing solvents
- ▶ Designed to remove grease, oil and workshop grime from all surfaces
- ▶ Safe on metal, most plastics and paints
- ▶ NSF K1 Registered

Part code **Size**
34131 **300ml**



22 A1

FOAM CLEANER SPRAY

Powerful, solvent free, fast acting food safe foaming cleaner.

Cuts through grease, dirt and grime.

- ▶ Active foaming - expands to cover large area
- ▶ Ideal for non-porous surfaces
- ▶ Safe for use on most plastics rubbers and painted surfaces
- ▶ Water based - free from solvents
- ▶ NSF A1 Registered

Part code **Size**
34141 **400ml**



Industrial Cleaners

Food Grade



FOOD GRADE
CLEANERS

A comprehensive range of products designed to meet the essential cleaning requirements of all maintenance jobs.

49 C1

REMOVER & DEGREASER SPRAY

Heavy duty, multi-purpose citrus based cleaner and label remover.

- ▶ Pleasant characteristic odour
- ▶ Powerful and fast acting - removes labels quickly
- ▶ Safe on metal, most plastics and painted surfaces
- ▶ NSF C1 Registered

Part code **Size**
34151 **300ml**



36 K2

ELECTRA CLEAN SPRAY

Food grade, residue free, high performance electrical cleaner.

A powerful, ultra fast drying cleaner designed for use on electrical equipment and components such as switches and switchgear.

- ▶ Rapid evaporation to leave no residue
- ▶ Designed for effective degreasing and cleaning
- ▶ Removes light to medium grease and oil contamination
- ▶ Compatible with most plastics
- ▶ NSF K2 Registered

Part code **Size**
34066 **300ml**






The ROCOL® range of general purpose food grade maintenance products are designed to be an easy to use and cost effective part of any maintenance program in the food, clean and pharmaceutical industries.

All FOODLUBE® maintenance products are NSF H1 registered and ISO 21469 certified - unless otherwise stated.

SELECTION CHART

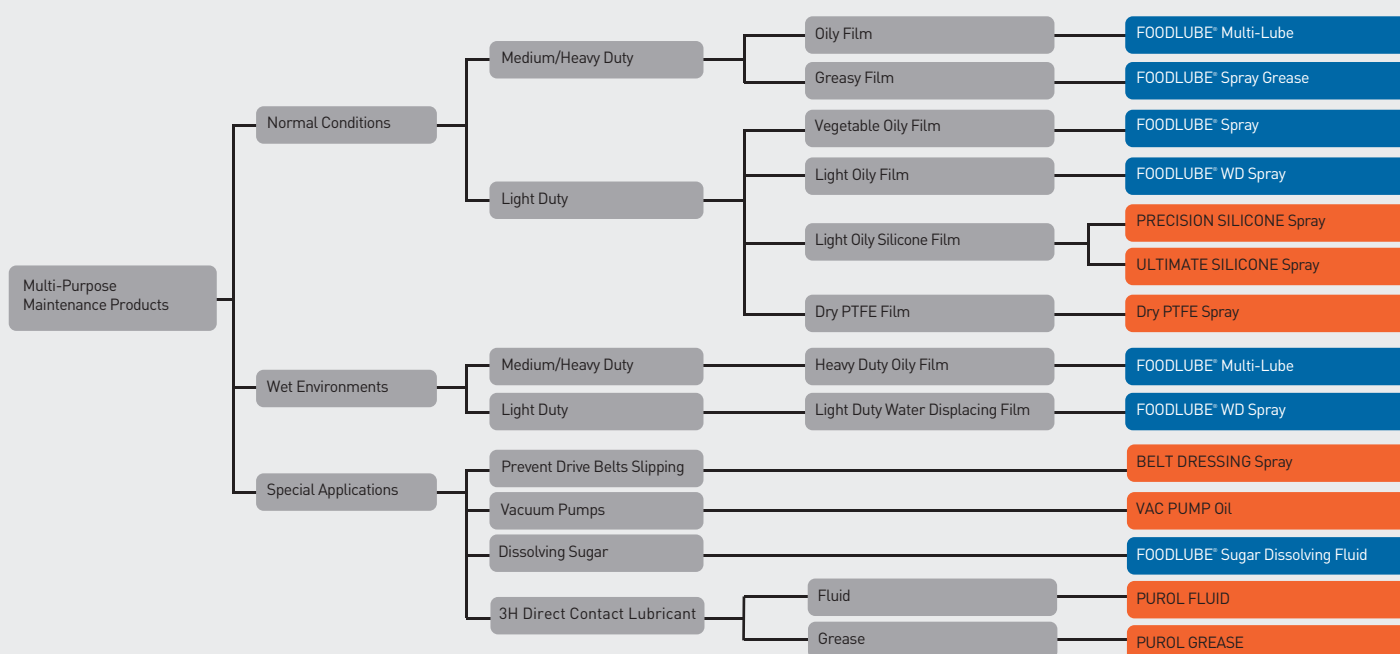

If you require help in selecting a product, contact ROCOL direct: +44 (0) 113 232 2600

20 H1 537

FOODLUBE® MULTI-LUBE FLUID



TEMP RANGE

-50°C to +180°C

A fully synthetic, multi-purpose lubricant, for effective lubrication particularly on chains, bearings and slides.

- ▶ Clean, non-toxic, thin film aids fast penetration for effective lubrication
- ▶ Good load carrying properties - protects components for longer
- ▶ Excellent corrosion protection
- ▶ Available as bulk or convenient trigger pack

Part code **Size**
15120 500ml
15126 5L

12 H1 537

FOODLUBE® SPRAY



TEMP RANGE

-20°C to +110°C

High performance versatile lubricant spray for all-round light lubrication of small bearings, pins, bushes and slides.

- ▶ Long lasting protective film
- ▶ Good corrosion protection
- ▶ Suitable for use as a food-grade drilling, tapping and cutting lubricant particularly when maintenance has to be carried out in the process area

Part code **Size**
15710 300ml

32 H1 537

FOODLUBE® WD SPRAY



TEMP RANGE

-50°C to +120°C

Food grade water displacing and lubricating spray.

- ▶ Silicone free formulation
- ▶ Excellent anti-wear and lubricating properties - extending component life
- ▶ Superior penetrating and cleaning performance - clean and lubricate in one application
- ▶ Outstanding corrosion protection

Part code **Size**
15010 300ml

Multi-Purpose Maintenance Products

Food Grade



MULTI-PURPOSE
MAINTENANCE
PRODUCTS

31 H1 537

FOODLUBE® SPRAY GREASE



TEMP RANGE

-50°C to +160°C

High performance, multi-purpose, food grade grease.

Multi-purpose extreme pressure spray grease, designed for the enhanced lubrication of all types of slides, bushes, pins and bearings.

- ▶ Superior load and wear properties - Significantly extends bearing life
- ▶ Highly resistant to water washout - Excellent corrosion protection

Part code **Size**
15030 **400ml**

4 H1

DRY PTFE SPRAY



TEMP RANGE

-200°C to +270°C

Food grade, premium performance, invisible dry film lubricant.

Low friction, non-stick, PTFE lubricant for the dry lubrication of cams, slides, open bearings, chutes and shears.

- ▶ Non staining, friction reducing film
- ▶ High percentage PTFE content - reduced waste due to significantly higher levels of active ingredient
- ▶ For use where wet film cannot be tolerated

Part code **Size**
34235 **400ml**

1 H1

PRECISION SILICONE SPRAY



TEMP RANGE

-50°C to +200°C

Food grade, high performance, silicone aerosol.

A high performance, colourless non-stick lubricating film with wide temperature stability for use on slides, chutes, bearings and conveyors.

- ▶ Long lasting formulation - reduced waste due to significantly higher levels of active ingredient
- ▶ Resists oxidation and corrosion
- ▶ Non-toxic, clean and colourless

Part code **Size**
34035 **400ml**

29 H1

BELT DRESSING SPRAY



TEMP RANGE

-50°C to +100°C

Food grade spray to eliminate belt slip and maximise belt life.

Conditions and lubricates all types of drive and conveyor belts.

- ▶ Adheres strongly to any belt material
- ▶ Gives instant grip, prevents glazing and reduces slippage
- ▶ Conditions belts to prevent cracking and breakage
- ▶ Resists build up of grease and dirt
- ▶ Non-toxic and colourless

Part code **Size**
34295 **300ml**

21 H1 537

FOODLUBE® SUGAR DISSOLVING FLUID



TEMP RANGE

+5°C to +95°C

Food grade spray to dissolve and remove sugars and fondants from all surfaces.

Rapidly dissolves all sugars and fondants from all surfaces leaving a light lubricating, protective film.

- ▶ Rapid penetrating action
- ▶ Protects against corrosion
- ▶ Available in bulk and easy to apply trigger spray

Part code **Size**
15110 **500ml**
15116 **5L**

69 H1

ULTIMATE SILICONE SPRAY



TEMP RANGE

-50°C to +200°C

The ultimate high work-rate silicone spray with enhanced spray distance, superior film formation and a 360° spray function.

- ▶ Optimised impression count per can, helping reduce changeover frequency and overall spray usage.
- ▶ A long spray reach of up to 0.8 metres ensures faster application to larger surface areas.
- ▶ 30% more silicone content compared to standard competitor products for longer-lasting protection and reduced reapplication.

Part code **Size**
34045 **400g**



A range of premium, food grade, quality products which protect fasteners against heat and corrosive attack, and ease future dismantling thereby reducing downtime and costs.

2 H1 537

FOODLUBE® MULTI-PASTE

TEMP RANGE

-30°C to +450°C



Food grade, multi-purpose anti-seize and lubricating paste.

A superior performance, white anti-seize and assembly paste developed for protecting fasteners and lubricating bushes, slides and small open gears in a convenient aerosol.

- ▶ Ideally suited for use on a large range of surface including stainless steel
- ▶ Long life, up to six times more than the competition
- ▶ For high temperature applications
- ▶ Prevents galling and pick-up on assembly
- ▶ Extremely tenacious – resists water wash out

Part code

15750

15753

15756

Size

85g

500g

5kg



Anti-Seize and Assembly Products

Food Grade



ANTI-SEIZE & ASSEMBLY



26 H1 537

FOODLUBE® MULTI-PASTE SPRAY

TEMP RANGE

-30°C to +450°C



Food grade, multi-purpose anti-seize and lubricating spray.

A superior performance, white anti-seize and assembly paste developed for protecting fasteners and lubricating bushes, slides and small open gears in a convenient aerosol.

- ▶ Ideally suited for use on a large range of surface including stainless steel
- ▶ Long life, up to six times more than the competition
- ▶ Exceptionally clean compared to copper based anti-seize
- ▶ Prevents galling and pick-up on assembly
- ▶ Extremely tenacious – resists water wash out

Part code

15751

Size

400ml

23 H1 537

FOODLUBE® DISMANTLING SPRAY

TEMP RANGE

-20°C to +110°C



Highly penetrating food grade release spray.

A fast acting penetrating spray for the fast and effective release of corroded and seized components.

- ▶ Highly efficient penetration
- ▶ Short term corrosion protection for released parts
- ▶ Non-toxic

Part code

15720

Size

300ml



NSF Categories

NSF CATEGORY DEFINITION



3H: Used for release agents.

H1: Used for lubricants which can be used in and around food processing areas where incidental food contact can be tolerated.

H2: Used for lubricants which can be used in a food processing area, provided there can be no food contact.

K1: Used for cleaning and/or degreasing solvents. This category is NOT suitable for use in processing areas.

K2: Used for solvents for cleaning electronic instruments and devices.

K3: Used for adhesives or glue removers.

A1: Used for general cleaning compounds.

C1: Used for general products for use in inedible product processing, non-processing areas and/or exterior areas of food processing establishments.

Case Study

APPLICATION REQUIREMENTS

An original equipment manufacturer (OEM) of handling and processing equipment supplied in to the food and pharmaceutical industry.

CUSTOMER

Leading pharmaceutical OEM.



APPLICATION DETAILS AND BACKGROUND

An original equipment manufacturer (OEM) of handling and processing equipment supplied in to the food and pharmaceutical industry. Part of the equipment is a high-speed gearbox as can be seen in the photos.

This particular gearbox was experiencing premature failure. ROCOL were brought in to investigate why. Analysis carried out showed that the operating temperature was high, the noise was excessive, and the grease was not staying on the gear teeth. These three factors meant that excessive wear was being generated on the gear teeth.

ROCOL had been developing a new semi-fluid grease and decided that this was a perfect opportunity to trial the product in a real-world application. A controlled trial was set up and ran for a total duration of 50 hours.

BENEFITS

The gearbox running temperature was reduced by 15°C – a considerable reduction.

Which means: Much less wear is generated, and the gearbox will run more efficiently and effectively saving time and money in gearbox refits/ replacements. The gearbox also ran a lot quieter, the noise was reduced by 15db.

Which means: The impact on noise pollution will be a significant health and safety improvement. Especially when multiplied across all gearboxes used in the facility.

“The gearbox trial ran for 50 hours with FOODLUBE Hi-Load SF and we didn’t notice any changes in the temperature or noise which is a real positive. We have had quite a lot of gearbox failures in the past where the gears have mashed together, and the bearings destroyed and now using FOODLUBE Hi-Load SF we feel that with the moving parts will constantly be lubricated dramatically reducing the risk of failure.”

Quality Engineer

ROCOL®



ROCOL® FOODLUBE® PUROL™ DETEX® ROCOLcare®
are trademarks of ITW Inc.



INVESTORS
IN PEOPLE

GA LINDBERG

Order & kundservice: 020-73 20 00
Växel: 08-703 02 00
Allmänt/General: info@galindberg.se