

Features & Benefits

- 💧 Cures in shadow areas
- 💧 High shear strength
- 💧 Excellent environmental resistance
- 💧 100% solids, no solvents
- 💧 Suitable for sealing ammunition

Description

PERMABOND® UV7134 is a UV-curable adhesive with a secondary anaerobic cure mechanism. This makes it ideal for bonding applications where UV-light cannot penetrate, to provide full cure in shadow areas. This dual cure mechanism helps speed up production rates. The UV cure tacks the components in place in seconds, reducing the need for jiggling. The bulk of the adhesive then cures more slowly to produce optimum performance. This product is ideal for sealing blank bullet crimps and is friable, turning to a dust when fired. Contains a UV-tracer for easy inline QC inspection.

Physical Properties of Uncured Adhesive

Chemical composition	Methacrylate ester
Appearance	Green
Viscosity @ 25°C	2400 mPa.s (cP)
Specific gravity	1.1

Typical Curing Properties


Typical fixture time*	Low power 4mW/cm ² battery lamp: <10 secs LED 100mW/cm ² lamp: 3 secs UV light guide 30W/cm ² : 2 secs
Cure wavelength	365-420nm
Anaerobic handling time	30 minutes (copper)
Anaerobic working strength	2-3 hours
Maximum gap fill	0.25mm (0.01")

*The cure time depends on the power of the UV lamp, its spectral output, the distance between the lamp and the components, and the transmission characteristics of the substrates.

Typical Performance of Cured Adhesive

Torque strength (copper)	10-12 Nm
Hardness (ISO868)	80 Shore D
Dielectric strength	10-12 KV/mm
Dielectric constant 1MHz@25°C	4
Coefficient of thermal expansion	85 x 10 ⁻⁶ mm/mm/°C
Coefficient of thermal conductivity	0.1 W/ (m.K)

*Strength results will vary depending on the level of surface preparation and gap.

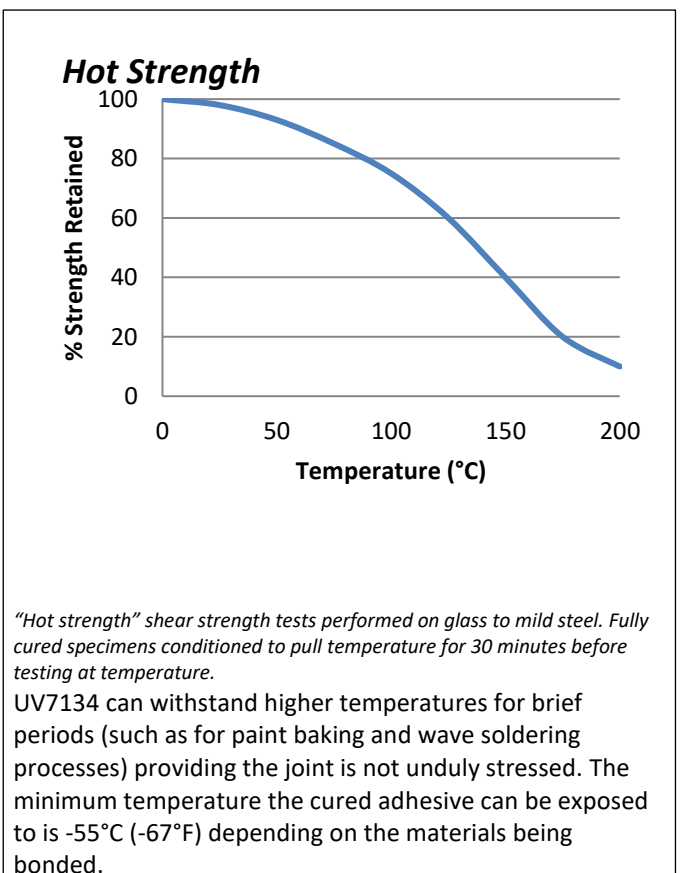

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.

Additional Information

This product is not recommended for use in contact with strong oxidizing materials.

Information regarding the safe handling of this material may be obtained from the Safety Data Sheet.

Users are reminded that all materials, whether innocuous or not, should be handled in accordance with the principles of good industrial hygiene.

Surface Preparation

Surfaces should be clean, dry and grease-free before applying the adhesive. Particular care should be taken to remove silicone based cleaning agents which may have been used previously to clean glass.

Some metals such as aluminium, copper and its alloys, will benefit from light abrasion with emery cloth (or similar) to remove the oxide layer.

Isopropanol can be used to degrease most surfaces.

Where thermoplastic surfaces are involved we recommend tests are done to ensure compatibility, mold release agents may affect bond strength.

Directions for Use

- 1) Adhesive can either be applied directly from the bottle or dispensed via automated dispensing equipment for more accurate dosing. Minimise exposure of product to ambient light.
- 2) For assemblies where neither component is metallic and where UV-light cannot reach the adhesive, apply Permabond A905 or ASC-10 to one component.
- 3) It is important to try to prevent air entrapment within the joint as this could be detrimental to the finished appearance of the adhesive.
- 4) Parts should be firmly held and not disturbed during cure. Expose the joint to ultra-violet light for the appropriate time to ensure full cure. Cure time depends on the power of the UV lamp, its spectral output, the distance between the lamp and the components, and the transmission characteristics of the substrates.
- 5) For help selecting a suitable lamp and/or dispensing equipment, please contact the Permabond technical helpline.

Storage & Handling

Storage Temperature	5 to 25°C (41 to 77°F)
Protect liquid adhesive from room lighting.	

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.

Other Products Available

Anaerobics

- Thread lockers
- Thread sealants
- Gasket makers
- Sealants / retainers

Cyanoacrylates

- Instant adhesives
- For rapid bonding of metals, plastics, rubber and many other materials

Epoxies

- Two-part room temperature cure adhesives
 - Single-part heat cure adhesives
- Modified Technology (MT) flexible grades available

MS-Polymers

- Single-part, moisture-curing, flexible sealants

Polyurethanes

- Two-part room temperature curing adhesives

Toughened Acrylics

- Rapid curing, high strength structural adhesives

UV Light Cured Adhesives

- Glass / plastic bonding
 - Optically clear
 - Non-yellowing

This Technical Datasheet (TDS) offers guideline information and does not constitute a specification.

www.permabond.com

• UK: 0800 975 9800

• General Enquiries: +44 (0)1962 711661

• US: 732-868-1372

• Asia: + 86 21 5773 4913

info.europe@permabond.com

info.americas@permabond.com

info.asia@permabond.com